

ガソリンの分析

Analysis of Gasoline

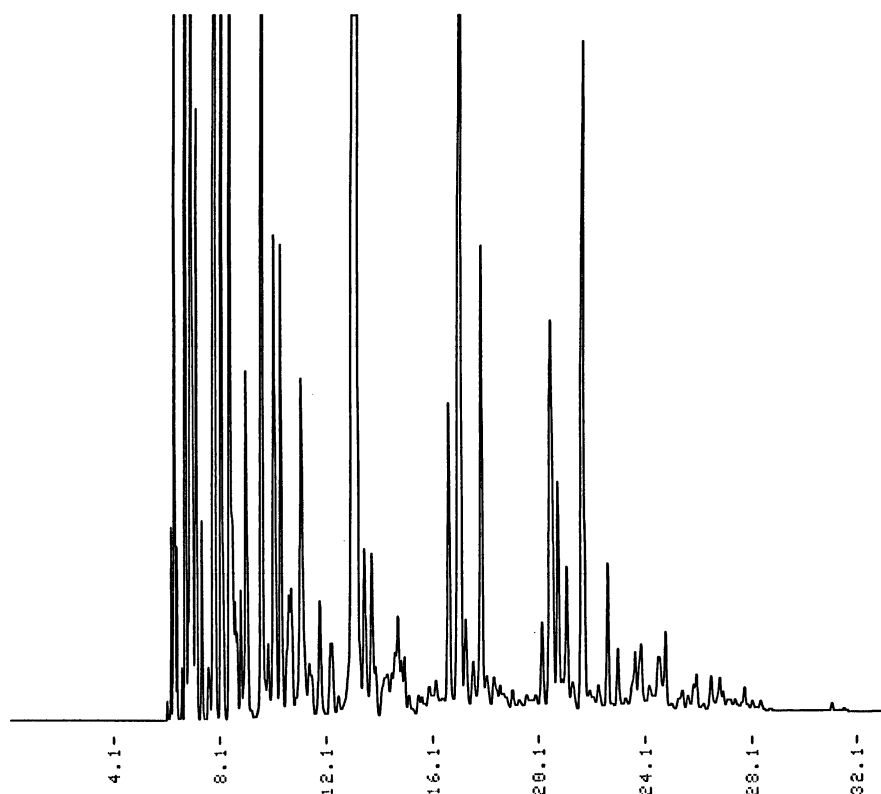


Fig. Chromatogram of Gasoline.

【Analytical conditions】

Column: **G-column G-100** 120 m L. (40 m L. × 3) × 1.2 mm I.D. 1 μm film thickness
Flow rate: He 20 mL/min
C.Temperature: 40°C (5 min hold) → 5°C/min → 180°C
Detection: FID
Injection volume: 1 μL
System: -