

炭化水素(C1~C14)の分析

Analysis of Hydrocarbons

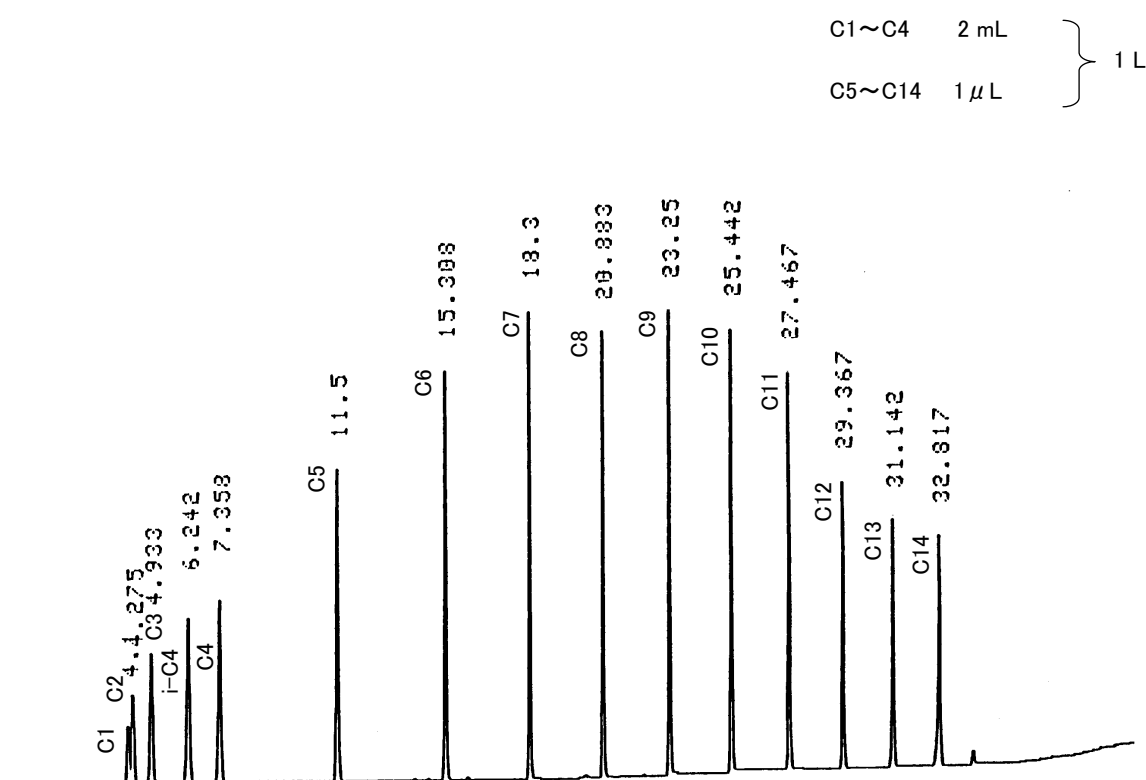


Fig. Chromatogram of Hydrocarbons.

【Analytical conditions】

Column: **G-column G-100** 40 m L. × 1.2 mm I.D. 5 μm film thickness
 Flow rate: He 10 mL/min
 C.Temperature: -20°C (5 min hold) → 8°C/min → 250°C
 Detection: FID
 Injection volume: 2 mL
 System: -