

炭化水素 (C7~C25) の分析

Analysis of Hydrocarbons

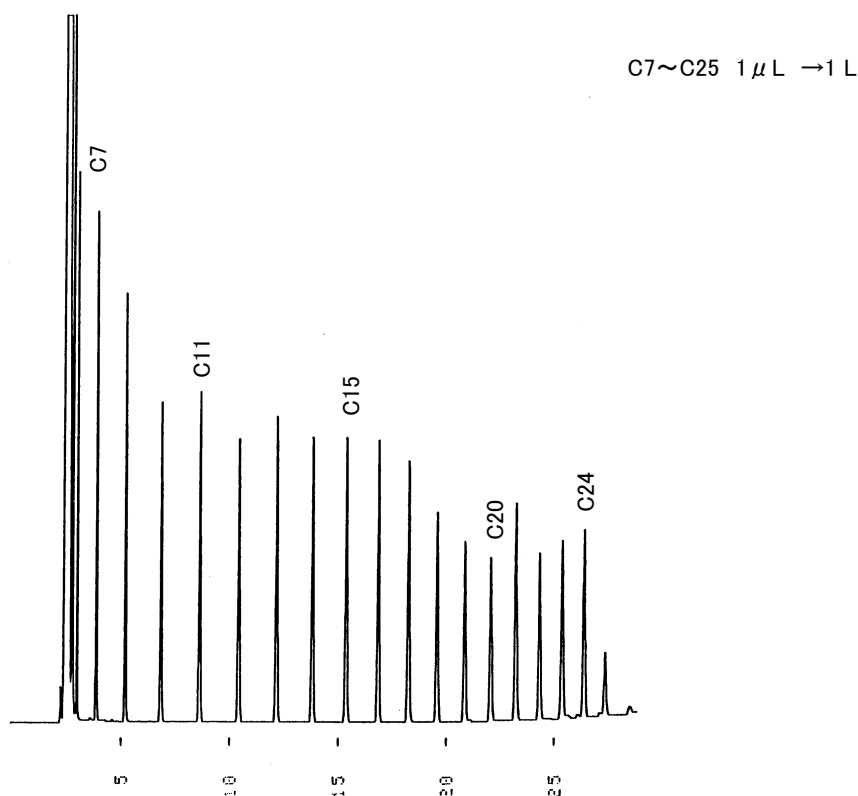


Fig. Chromatogram of Hydrocarbons.

【Analytical conditions】

Column: **G-column G-100** 40 m L. × 1.2 mm I.D. 1 μ m film thickness
Flow rate: He 20 mL/min
C.Temperature: 50°C → 8°C/min → 280°C
Detection: FID
Injection volume: 0.5 μ L
System: -